MX4P

2-Way 4″ High-Fidelity Ceiling Speaker

The Quest MX4P is a compact pendant-mounted loudspeaker that brings the high-fidelity performance of the MX Series into spaces where ceiling integration is not possible or where a visible pendant element is architecturally preferred. Sharing the same driver configuration as the MX4C, the MX4P delivers precise and articulate sound reproduction, featuring a custom-fabricated die-cast aluminium woofer paired with a titanium dome tweeter.

Supporting both 16Ω low-impedance and 70/100V distributed systems, the MX4P provides installation flexibility across commercial, hospitality, and mixed-format venues. Acoustically matched to the MX Series, it ensures consistent tonal performance when deployed alongside ceiling-mounted MX speakers. Available in white or black, it integrates discreetly or as a deliberate design element depending on the application.

KEY SPECIFICATIONS

Impedance	16Ω & 70V/100V
Transducers	1″ HF & 4″ LF
Dispersion	160° x 130°
Power	60W RMS
Colours	Black and White

*Quest Engineering reserves the right to make changes in specifications, or products without prior notice.

SPECIFICATIONS

COLOURS	WHITE (RAL9003)	BLACK (RAL9004)
MODELS	**MX4PW**	**MX4PB**
FREQUENCY RESPONSE (-6dB)	79Hz to 20kHz	
SENSITIVITY - 1W @ 1m	86dB	
MAXIMUM SPL @ 1m	104dB	
POWER HANDLING (RMS/PEAK)	60W / 120W	
NOMINAL IMPEDANCE	16Ω	
TRANSDUCERS	HF: 25mm (1") Dome Tweeter / LF: 101.6mm (4") Woofer	
DISPERSION (H° x V° -6dB)	160° x 130°	
DIRECTIVITY INDEX	3dB	
TRANSFORMER SETTINGS	100V: 4W / 8W / 15W / 30W	
	70V: 2W / 4W / 8W / 15W	
CONNECTIONS	Euroblock/Phoenix Connector - 5.08mm Pitch (In/Thru)	
RIGGING POINTS	Safety Cable Attachment Point	
DIMENSIONS (W x D)	220 x 270mm (8.7" x 10.6")	
WEIGHT	3.4kg (7.5lb)	
CABINET MATERIAL & FINISH	ASA Injection Mold pendant with black powder-coated finish	
GRILLE MATERIAL & FINISH	Removable rimless magnetic grille constructed from powder-coated steel	
SHIPPING DIMENSIONS (H x W x D)	290 x 290 x 325mm (11.4" x 11.4" x 12.8")	
SHIPPING WEIGHT	4kg (8.8lb)	
RECOMMENDED POWER AMPLIFIER	Quest QX or QXD Amplifiers	
ACCESSORIES (INCLUDED)	Grille & Top Hat	

*Quest Engineering reserves the right to make changes in specifications, or products without prior notice.

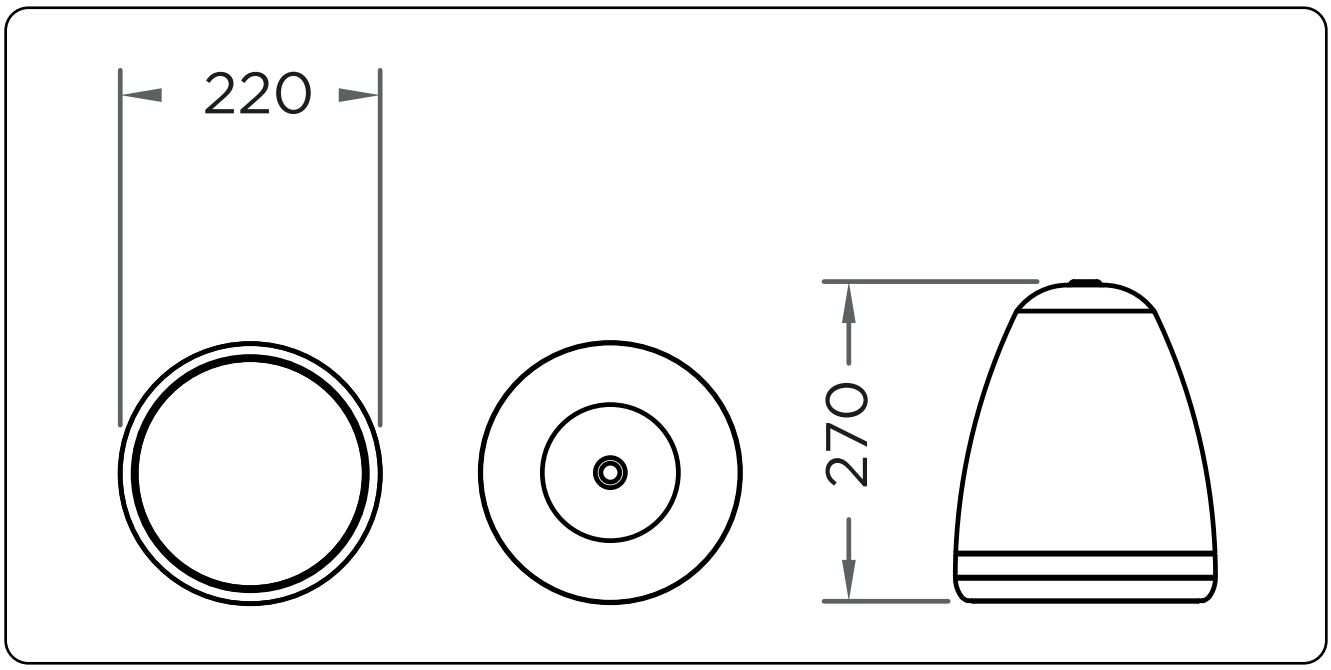

MX4P

The loudspeaker shall be a Quest MX4P pendant-mounted, full range loudspeaker designed for use in distributed and low impedance audio systems. The loudspeaker shall incorporate a 101.6mm (4″) low-frequency driver and a 25mm (1″) high-frequency dome tweeter, providing a frequency response of 79Hz to 20kHz (−6dB) with a nominal sensitivity of 86dB (1W @ 1m).

The loudspeaker shall deliver a maximum sound pressure level of 104dB at 1m and shall have a nominal impedance of 16Ω. It shall support both low-impedance operation and 70V/100V distributed systems via an integrated transformer with selectable tap settings of 2W to 15W (70V) and 4W to 30W (100V). Nominal power handling shall be 60W RMS and 120W peak.

Dispersion shall be nominally 160° × 130° (−6dB), with a directivity index of approximately 3dB, ensuring wide and uniform coverage suitable for open-ceiling environments. Electrical connection shall be via a 5.08mm Euroblock/Phoenix connector with loop-through (In/Thru) capability.

The enclosure shall be constructed from ASA injection-moulded material with a durable powder-coated finish, supplied with a removable rimless magnetic steel grille. The loudspeaker shall include a dedicated safety cable attachment point for secondary support. Dimensions shall not exceed 220mm (W) × 270mm (D), with a net weight of approximately 3.4kg.

The loudspeaker shall be available in white (RAL9003) or black (RAL9004) finishes. Included accessories shall comprise grille and top hat. The loudspeaker shall be suitable for use with Quest QX or QXD series power amplifiers.

*Quest Engineering reserves the right to make changes in specifications, or products without prior notice.

QUEST

questaudio.com.au